Data Sheet KK 762

Double-sided PE foam adhesive tape
with a synthetic rubber adhesive (strong adhesive)

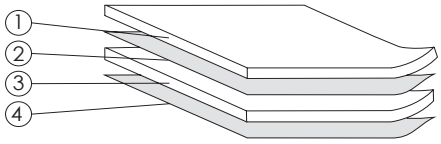

① **White silicone paper**
② **Synthetic rubber adhesive (strong adhesive)**
③ **PE-foam (2,0 mm)**
④ **Synthetic rubber adhesive (strong adhesive)**

Technical Data

Adhesive	Synthetic rubber (hot melt)
Carrier material	White PE foam (67 kg/m³)
Liner	White silicone paper
Total thickness	2.0 mm
Adhesion to V2A stainless steel	> 20 N/25 mm (foam splitting) (according to FTM 1)
Shear strength on V2A stainless steel	> 200 hours (according to FTM 8)
Temperature range	−40 °C to +75 °C

This product complies with EU Directive 2002/95/EC (RoHS) and Directive 2006/122/EC (PFOS).
It does not contain any substances listed in the VDA list.

Application examples can be found at: www.kk-klebetechnik.

Durability / Storage
When stored in the original packaging at 21°C and 50% relative humidity, this product has a shelf life of 12 months.
Before processing, carefully check that the contact surface is completely dry and free of oil, grease, and dust.

Note
The technical data provided is given to the best of our knowledge but is non-binding.
The information in this datasheet is intended as a general recommendation.
To ensure the product's suitability for the intended application, it must be verified through testing under the actual conditions.

08 / 2026

K + K Klebetechnik GmbH & Co. KG
Schönbornsluster Straße 4
56070 Koblenz

Tel.: +49 (0) 261 / 291 750 00
E-Mail: Info@kk-klebetechnik.de