Data Sheet KK 975

Double-sided nonwoven adhesive tape with acrylic adhesive for the ATG system
(very strong tack)

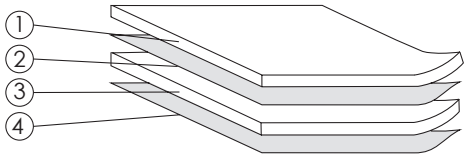

① Silicone paper (white)
② Acrylic adhesive
③ Paper nonwoven
④ Acrylic adhesive

Technical Data

Adhesive	Solvent acrylic
Carrier	Paper nonwoven
Release liner	white silicone paper, 110 g/m²
Total thickness	0.10 mm
Peel adhesion	15 ± 2 N/25 mm (PSTC 1)
Temperature resistance	-40°C to +120°C

Application examples can be found at: www.kk-tapes.com

Durability / Storage
When stored in the original packaging at 21°C and 50% relative humidity, this product has a shelf life of 12 months.
Before processing, carefully check that the contact surface is completely dry and free of oil, grease, and dust.

Note
The technical data provided is given to the best of our knowledge but is non-binding.
The information in this datasheet is intended as a general recommendation.
To ensure the product's suitability for the intended application, it must be verified through testing under the actual conditions.

08 / 2026

K + K Klebetechnik GmbH & Co. KG
Schönbornsluster Straße 4
56070 Koblenz

Tel.: +49 (0) 261 / 291 750 00
E-Mail: Info@kk-klebetechnik.de